


*The Cattleman's*

**CHOICE**

FOR LIVE ANIMAL WEIGHING

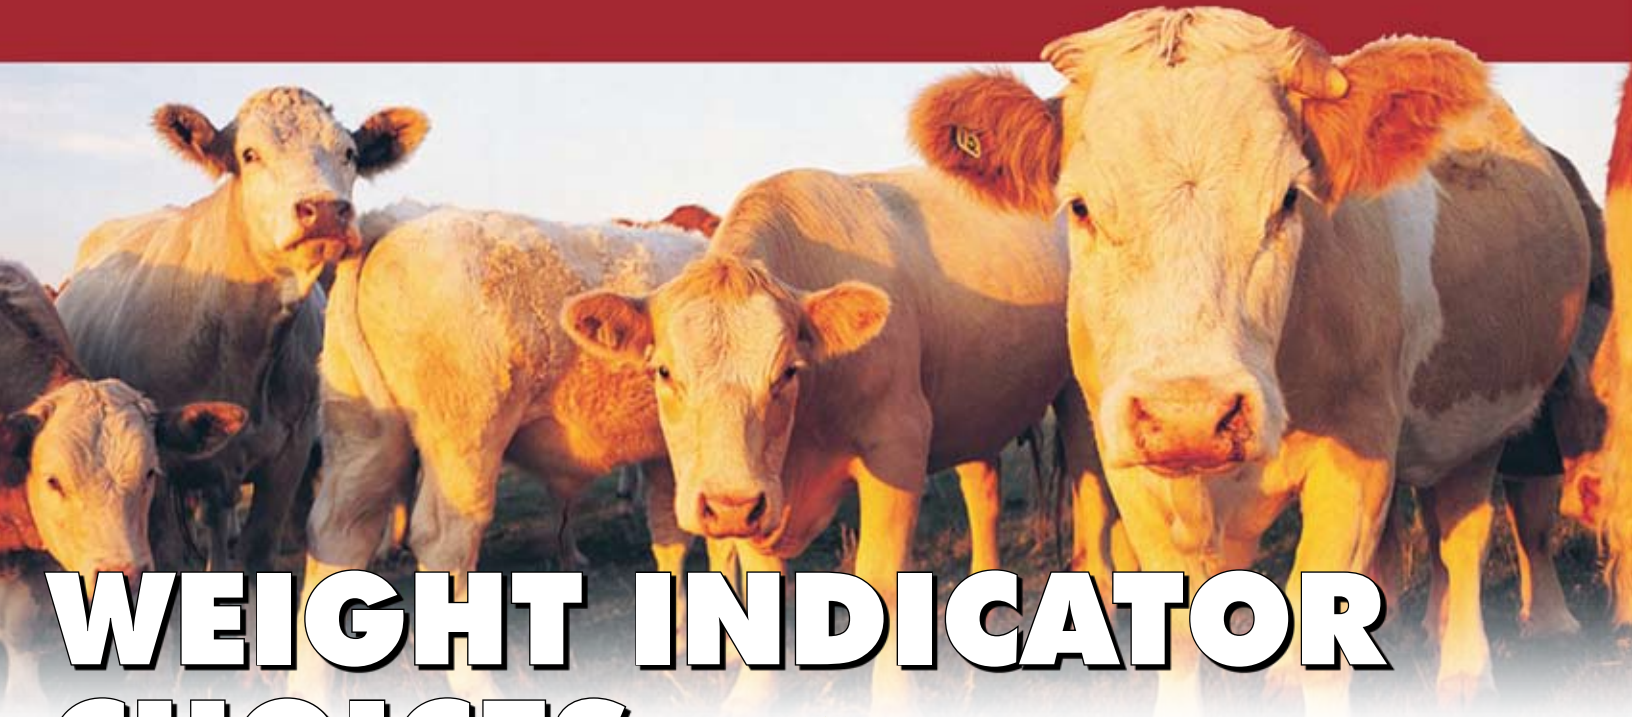

# WEIGHT INDICATOR CHOICES

**FREE**  
DATA DOWNLOAD  
SOFTWARE AVAILABLE

**WORKS  
WITH  
RFID!**



**MODEL 500G**



**MODEL 600GSX-2**



**MODEL 300G**

**FREE**  
DATA DOWNLOAD  
SOFTWARE AVAILABLE

# WEIGHT INDICATORS

- ▶ Ruggedly built for livestock handling
- ▶ Proudly made in Canada
- ▶ Easy to use electronics
- ▶ Models available to suit every application
- ▶ Reliable weighing in harsh climates
- ▶ Superior accuracy improves profits

## SPECIFICATIONS

		Model 300G	Model 300GX-2	Model 500G	Model 500GX-2	Model 600GSX-2
<b>Display</b>	LCD	6 Digits x 1"	6 Digits x 1"	6 Digits x 1"	6 Digits x 1"	1.5" Graphic (240x64)
	Backlight	✗	✗	✓	✓	✓
<b>Interface Ports</b>	Serial Port 1	RS-232	RS-232	RS-232	RS-232	RS-232
	Serial Port 2	✗†	RS-232†	✗	RS-232	RS-232
	Alarm Output	✗	✗	1 TTL	1 TTL	1 TTL
	Remote Communication*	✓	✓	✓	✓	✓
<b>Weight Records</b>	Storage Capacity	1,600	3,200	1350	12,800	10,000
	Record Content	Weight	Weight, Date & Time, RFID**	Weight, Date & Time	Weight, Date & Time, RFID**	Weight, Date & Time, RFID**, Visual ID
	Unique Lots‡	20	20	50	50	50
	Min/Max/Average (by lot)	✓	✓	✓	✓	✓
<b>Weighing Operation</b>	Increments	1, 2, 5, 10	1, 2, 5, 10	1, 2, 5, 10	1, 2, 5, 10	1, 2, 5, 10
	Decimal Points	Any Position	Any Position	Any Position	Any Position	Any Position
	Weighing Units	lb, kg	lb, kg	lb, kg	lb, kg	lb, kg
	Zero Tracking	✓	✓	✓	✓	✓
	Average & Hold	✓	✓	✓	✓	✓
	Weight Triggered Alarm	✗	✗	✓	✓	✓
	Gross/Net/Tare	✗	✗	✓	✓	✓
	Field Adjustable Calibration	✓	✓	✓	✓	✓
	Auto-Calibrate††	✓	✓	✓	✓	✓
	<b>General</b>	Supply Voltage (VDC) ‡	12 to 24	12 to 24	12 to 24	12 to 24
Supply Current (1 Load Cell)		100mA	150mA	200mA	250mA	300mA
Load Cell Excitation (VDC)		7.5V	7.5V	7.5V	7.5V	7.5V
Load Cell Capacity (350Ω/700Ω)		Up to 6/12	Up to 6/12	Up to 6/12	Up to 6/12	Up to 6/12
Operating Temperature		-5°F to 140°F / -20°C to 60°C	-5°F to 140°F / -20°C to 60°C	-5°F to 140°F / -20°C to 60°C	-5°F to 140°F / -20°C to 60°C	25°F to 140°F / -5°C to 60°C
Overall Case Dimensions (WxHxD)		10" x 7" x 3 3/4" / 25.4cm x 17.8cm x 9.5cm	10" x 7" x 3 3/4" / 25.4cm x 17.8cm x 9.5cm	10" x 7" x 3 3/4" / 25.4cm x 17.8cm x 9.5cm	10" x 7" x 3 3/4" / 25.4cm x 17.8cm x 9.5cm	10" x 7" x 3 3/4" / 25.4cm x 17.8cm x 9.5cm
Shipping Weight	7.5 lb / 3.4 kg	7.5 lb / 3.4 kg	8.5 lb / 3.9 kg	8.5 lb / 3.9 kg	9 lb / 4.1 kg	

\* Remote Communication allows control and interfacing to an external PC or similar device.

\*\* Electronic Identification (RFID) operation has been verified with Symbol® barcode readers (RS-232 output), Allflex® S-2000, Stick and Panel readers, Destron Technologies® 2001F-ISO, Syscan-ID LiveTrack ISO reader as well as Y-Tex® Panel and Bluetooth® readers. Bluetooth readers require an additional adapter.

† Lots are used to group weight records, e.g. by pen, truckload, etc.

†† Auto-Calibrate feature requires compatible load cells from Reliable Scale

‡ 115vac to 12VDC adapter included as standard; battery clips or cigarette lighter adapter available as options

‡‡ 2nd Serial Port available as an internally mounted Bluetooth® module (Model -2W)

Specifications subject to change without notice.

**Serving livestock producers for OVER 25 YEARS!**

**Reliable**  
SCALE CORPORATION

Copyright © 2010 Reliable Scale Corporation

Contact your local Dealer:

**RELIABLE SCALE: 1-800-419-1189**  
**info@reliable-scale.com**  
**www.reliable-scale.com**